



Over 100 years of experience

Since 1901 the Chicago Pneumatic name has represented high-performance tools and equipment designed for an extensive range of applications. Today, Chicago Pneumatic has a global reach, with local customer centers around the world. Chicago Pneumatic products are tailored to the needs of the industrial, vehicle service, and construction markets. Every day we develop and manufacture new products that are meant to meet your demands not only today, but tomorrow as well.


To learn more about our extensive range of tools, hydraulic attachments, industrial and portable compressors, accessories and workshop equipment, please visit www.cp.com.

MODEL	MAX WORKING PRESSURE PSIG		FAD (") CFM	POWER HP	VOLT/PH/HZ	SOUND dB(A)	WEIGHT (LBS)	
	STD	T(with dryer)					STD	T(With dryer)
STANDARD UNIT								
SPR10 (T)	116	113	28.4	2 x 5	230/3/60	63	820	897
	145	141	24.2					
SPR10 (T)	116	113	28.4	2 x 5	430/3/60	63	820	897
	145	141	24.2					
SPR15 (T)	116	113	43.0	2 x 7.5	230/3/60	63	922	998
	145	141	31.8					
SPR15 (T)	116	113	43.0	2 x 7.5	430/3/60	63	922	998
	145	141	31.8					
SPR20 (T)	116	113	55.9	4 x 5	230/3/60	63	1278	1344
	145	141	48.7					
SPR20 (T)	116	113	55.9	4 x 5	430/3/60	63	1278	1344
	145	141	48.7					
SPR22 (T)	116	113	65.7	3 x 7.5	230/3/60	64	1263	1329
	145	141	50.2					
SPR22 (T)	116	113	65.7	3 x 7.5	430/3/60	64	1263	1329
	145	141	50.2					
SPR30 (T)	116	113	86.5	4 x 7.5	230/3/60	65	1514	1580
	145	141	63.6					
SPR30 (T)	116	113	86.5	4 x 7.5	430/3/60	65	1514	1580
	145	141	63.6					

*Performance recorded according to ISO 1217, Annex C, Ed. 2009

** NOTE: Weight is +/- 22 lbs (and does not include shipping material)

DIMENSIONS		L (in)	W (in)	H (in)
SPR 10 & 15 Low Canopy	Base mount (BM)	64.1	29.5	48.4
	Base mount + dryer	64.1	29.5	48.4
SPR 20, 22, & 30 High Canopy	Base mount (BM)	64.1	29.5	72.6
	Base mount + dryer	64.1	29.5	72.6

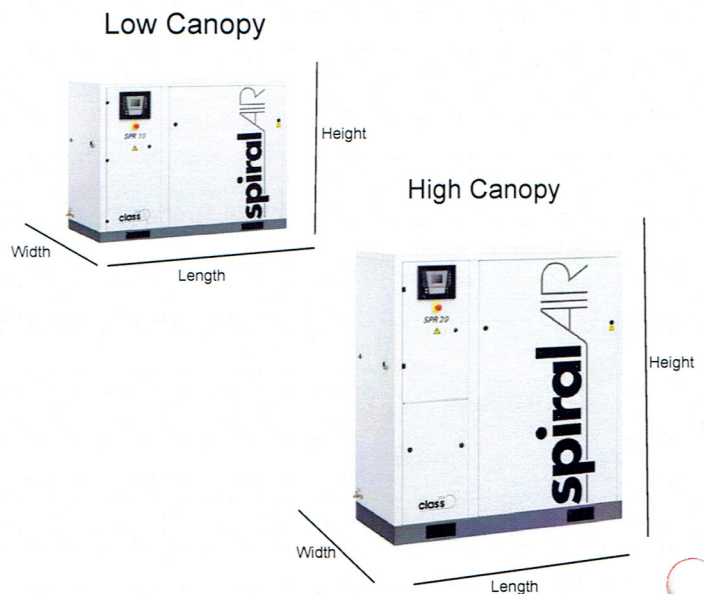

STANDARD DESIGN	
IE3 Premium efficiency NEMA motors (BELT DRIVE)	
Modern canopy with easy access for re-greasing and belt tensioning	
Color Graphic electronic controller with variable air technology algorithm, tight pressure band and remote visualization	
SPR T version with optimized dryer selection using R134a	
Ambient temperature sensor for improved performance and auto adjustment of service schedule	
Corrosion free piping with low radius for lower pressure drop	
Micronic high efficiency intake filter	
OPTIONS	
Connectivity with ES6i (Software); connect up to 6 SPR Multi units	

www.cp.com

© 2014 Chicago Pneumatic. All Rights Reserved.
Content is subject to change without notice.

08/14 001

For more information,
call 877.861.2722.

